

When used in combination with a Salcom Paging Message Transmitter, the 12-36 provides a telephone controlled, voice prompted paging interface. All paging functions available when using a paging message transmitter are also available via the office PABX system from any telephone, by using the telephone keypad. Users who are unfamiliar with the system are guided through the process by electronically recorded voice prompts.



## 12-36 Paging Telephone Voice Interface

Experienced operators can short cut the process by entering the appropriate key sequence without waiting for the prompts. The voice prompted telephone access system comprising a Paging Message Transmitter, and the 12-36 Telephone Voice Interface is called "FONEpage".

As when using a paging transmitter, there are several types of paging calls which can be made from telephone extensions:

### Normal pager call;

### Predefined message:

Predefined messages (sometimes called "canned messages") can be programmed into the paging transmitter using configuration software. Pager codes and predefined messages cannot be changed via the telephone.

### Message confirmation:

FONEpage confirms that the call has been sent once a call is placed into the transmission queue with the prompt "*Page Sent*" or "*Message Sent*" depending on the type of call made.


### Sending another message:

Once the "*Message Sent*" or "*Page Sent*" prompt has been issued, it is possible to immediately enter another pager code and message, or wait 5 seconds for the prompt to be guided through the process again.

**Automatic call termination:** FONEpage will say goodbye and hang up if nothing has been entered within 10 seconds of a prompt being issued.



To use the USB port to communicate with the 12-36, a Virtual Com Port driver must be installed on the PC.

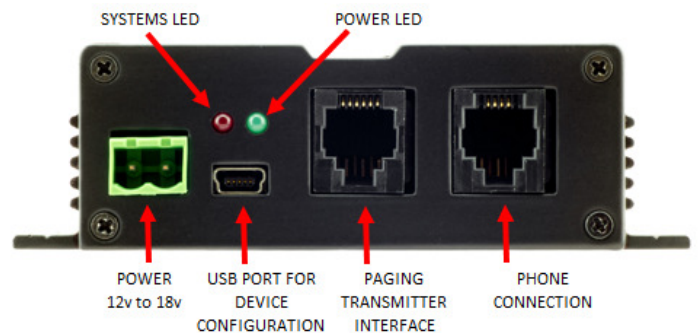

The 12-36 configuration tool allows configuration of:

- Language.
- Delay before 12-36 answers call.
- Custom wave files. New wave files can be uploaded to allow the 12-36 to use a custom message.

**Language:** Language to use. The 12-36 is pre-programmed with English (default), Spanish and French voice files. Using the configuration software the user may select a custom voice file option and upload their own wave files.

**Answer Delay:** How long the 12-36 will wait before answering the call. (In seconds 0-25). By using a long ring delay the 12-36 may share a common phone line if required.

**File Upload:** Allows message replacement when "custom" language has been selected.

Designed in New Zealand

| <b>Technical Specification</b>                       |   |
|--|---|
| <b>12-36-0000 - Paging Telephone Voice Interface</b> |   |
| Power Supply   | +13.8V typical (11 to 15 VDC range)   |
| Power Consumption                                    | Normal Operation: 45mA  |
| Configuration Application                            | 12-36 PSD   |
| Serial Port  | 9600 , N, 8, 1; USB   |
| Other I/O  | Telephone Interface: 2-Wire, 600Ω dc blocked transformer with electronic loop and optically isolated ring detector                    |
| Languages Supported                                  | English, French and Spanish. User may support any other language by uploading their own Wav files                                     |
| Connectors   | Paging transmitter interface (RS232) = RJ12 (6P6C)<br>Phone connection = RJ11 (6P4C)<br>Programming = mini USB                        |
| Power Connector                                      | 2-way plug & socket, screw connections (supplied)   |
| Environmental Protection                             | Not suitable for outdoor use and should be protected from adverse environmental conditions  |
| Operating Temperature                                | -10°C to +50°C (+14°F to +122°F)  |
| Indicators   | Power LED (Green)<br>- Slow Flashing = Normal Operation<br>Status LED (Red)<br>- On = Processing Call<br>- Flashing = Error Condition |
| Weight   | 302g  |
| Enclosure Dimensions                                 | 100mm x 130mm x 30mm (WxDxH)  |
| Enclosure Material                                   | Extruded aluminium  |
| Colour   | Matt black  |
| Type Approvals                                       | AS/NZS CISPR 22:2009 (EMC)<br>EN 55022:2006+A1:2007 (EMC)   |



Configuration tool available for free download at: [www.salcom.com](http://www.salcom.com)

Support: Tel: +64 (0)3 379 2298

Email: [sales@salcom.com](mailto:sales@salcom.com)

